


50Hz

ZB66KCE-TFD

R404A

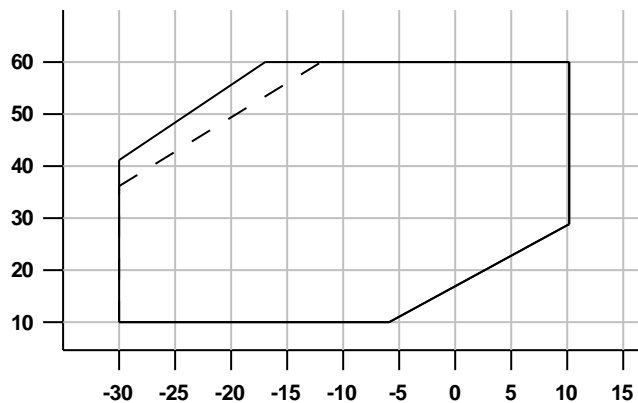

Minimum evaporating temp. with:
 ——— 10K Suction Superheat
 - - - 20°C Suction Gas Return

Suction Return Temperature 20,0°C **Evaporating Temperature °C** Liquid subcooling 0,0K

Cond °C	Capacity kW									
	-30	-25	-20	-15	-10	-5	0	5	7	10
10	10,20	12,60	15,55	19,00	23,10					
20	9,25	11,50	14,20	17,40	21,10	25,40	30,30			
30	8,19	10,25	12,70	15,55	18,85	22,70	27,10	32,00	34,20	37,60
35	7,62	9,59	11,90	14,55	17,65	21,20	25,30	29,90	32,00	35,20
40		8,88	11,05	13,55	16,40	19,70	23,50	27,80	29,70	32,60
45			10,15	12,45	15,10	18,15	21,60	25,50	27,30	30,00
50				11,30	13,70	16,45	19,60	23,20	24,80	27,30
55				10,05	12,25	14,70	17,55	20,80	22,20	24,50
60					10,70	12,90	15,40	18,30	19,55	21,60
	Power Input kW									
	-30	-25	-20	-15	-10	-5	0	5	7	10
10	3,25	3,31	3,36	3,42	3,50					
20	4,00	4,09	4,15	4,20	4,27	4,36	4,51			
30	4,91	5,02	5,09	5,14	5,18	5,25	5,35	5,50	5,58	5,73
35	5,46	5,58	5,65	5,70	5,73	5,78	5,85	5,98	6,05	6,17
40		6,22	6,29	6,33	6,36	6,39	6,44	6,53	6,58	6,68
45			7,03	7,06	7,08	7,09	7,11	7,17	7,21	7,29
50				7,90	7,90	7,89	7,89	7,92	7,94	7,99
55				8,85	8,84	8,81	8,78	8,78	8,79	8,81
60					9,91	9,86	9,81	9,77	9,76	9,76
	Current 400V, A									
	-30	-25	-20	-15	-10	-5	0	5	7	10
10	9,52	9,57	9,60	9,64	9,71					
20	10,11	10,20	10,26	10,31	10,37	10,47	10,62			
30	10,97	11,08	11,15	11,21	11,26	11,33	11,43	11,60	11,68	11,83
35	11,55	11,68	11,75	11,80	11,84	11,90	11,98	12,11	12,18	12,31
40		12,41	12,48	12,53	12,56	12,59	12,64	12,74	12,79	12,90
45			13,37	13,41	13,42	13,43	13,45	13,51	13,55	13,63
50				14,46	14,45	14,44	14,43	14,45	14,47	14,52
55				15,72	15,69	15,64	15,60	15,58	15,58	15,60
60					17,15	17,07	16,99	16,93	16,91	16,90
	Mass Flow g/s									
	-30	-25	-20	-15	-10	-5	0	5	7	10
10	57,40	71,20	88,00	108,50	133,00					
20	56,70	70,70	88,00	108,00	132,50	161,00	194,00			
30	55,40	69,70	87,00	107,00	131,00	159,00	192,00	230,00	247,00	275,00
35	54,40	68,90	86,00	106,00	130,00	158,00	190,00	228,00	245,00	273,00
40		67,70	84,50	104,50	128,00	156,00	188,00	226,00	243,00	271,00
45			83,00	103,00	126,50	154,00	186,00	223,00	240,00	268,00
50				101,00	124,00	151,00	182,00	220,00	237,00	264,00
55				98,00	121,00	147,50	179,00	216,00	233,00	261,00
60					117,50	144,00	175,00	213,00	230,00	258,00

Copeland Scroll - Compressor - Refrigeration - Standard
COMPRESSOR MECHANICAL AND PHYSICAL DATA

Displacement @ 50 Hz, cu.m/h	24.9
Length/Width, mm	264/284
Height, mm	546
Net Weight, kg	59.9
Rotalock Suction, inch	1 3/4
Rotalock Discharge, inch	1 1/4
Oil Quantity, l	3.2
Base mounting (hole dia), mm	190 x 190 (8.5)
Sound Pressure @ 1m, dBA	66
Sound Power, dBA	77
Sound Power with Sound Shell, dBA	67
PED Category	2
High Side PS, bar(g)	32
Low Side PS, bar(g)	22.6
Low Side TS Max., °C	50
Low Side TS Min., °C	-35
Internal Free Volume, l	13.3

COMPRESSOR ELECTRICAL DATA (380/420V - 3~ - 50Hz)

Maximum Operating Current, A	17.5
Locked Rotor Current, A	111
Winding Resistance, ohm	1.4
Default Enclosure Class	IP 21 (IEC 34)

ACCESSORIES INCLUDED

Discharge Temperature Protection	Internal Thermistor
Mounting Grommets	Standard

ACCESSORIES OPTIONAL

Crankcase Heater	90W External
Enclosure Class	IP66 With Molded Plug
Mounting Grommets	Hard Mounts for Paralleling
Oil Control System	ALCO Trax-Oil OM3
Sound Attenuation	Sound Shell (10dBA)
Rotalock valves	suction and discharge

MOTOR OPTIONS

Power Supply	Nominal Voltage	Motor Code	Start Connection	DOL Connection	Amps Factor
380-420 V/3~/50H	400	TFD		Y	1,00
200-220 V/3~/50H	200	TF5		Y	2,09
200-230 V/3~/60H	230	TF5		Y	2,09
575 V/3~/60Hz	575	TFE		Y	0,80
380 V/3~/60Hz	380	TF7		Y	1,26
460 V/3~/60Hz	460	TFD		Y	1,04